



SBL GROUP

SBL-820SEF *Avior*

AUTOMATIC FOIL STAMPING AND DIECUTTING PLATEN

FEATURES

1. Computerized foil control system and full color touch screen monitor with self-diagnostic system is easy to operate and helpful for troubleshooting on each section.
2. Standard 3 shaft foil feeding system on delivery station with individual programmable for foil pull length and easy foil loading system.
3. Unique style 3 air-shaft foil rewind device, ensure the foil rewind properly and make it easy to change waste foil.
4. 8 Zone with individual temperature control for each zone.
5. Pneumatic honeycomb and chase locking system to eliminate loose mechanical parts.
6. Automatic impression on/off system with tonnage searching pre-set program, maximum 200 metric tones of pressure for die cutting and foil stamping.
7. Standard equipped with head-stop and push and pull 2-in-1 side guide device.
8. Both feeder and delivery section have standard with non-stop device to ensure continuous production.
9. Wide range of stock from light paper to B-flute.
10. Optional hologram system available.




SBL-820SEF *Avior*




FEEDER



LARGE SIZE, FULL COLOR TOUCH
SCREEN MONITOR SYSTEM



SHEET SLOW DOWN DEVICE



QUICK WHEEL-SET
SYSTEM FEED TABLE




FOIL DETECTION SYSTEM



FOIL REWINDER AND DANCER
ROLLER SYSTEM




CUTTING STATION



DIE CUTTING DIE
LOCKING CHASE



STAMPING DIE LOCKING
HONEY-COMB SYSTEM




FOIL FEEDING SYSTEM



HEATER AND FOIL PULL
CONTROL SYSTEM

- EASY OPERATION
- HIGH EFFICIENCY
- ECONOMICAL AND PRACTICAL
- THE MOST IDEAL CHOICE

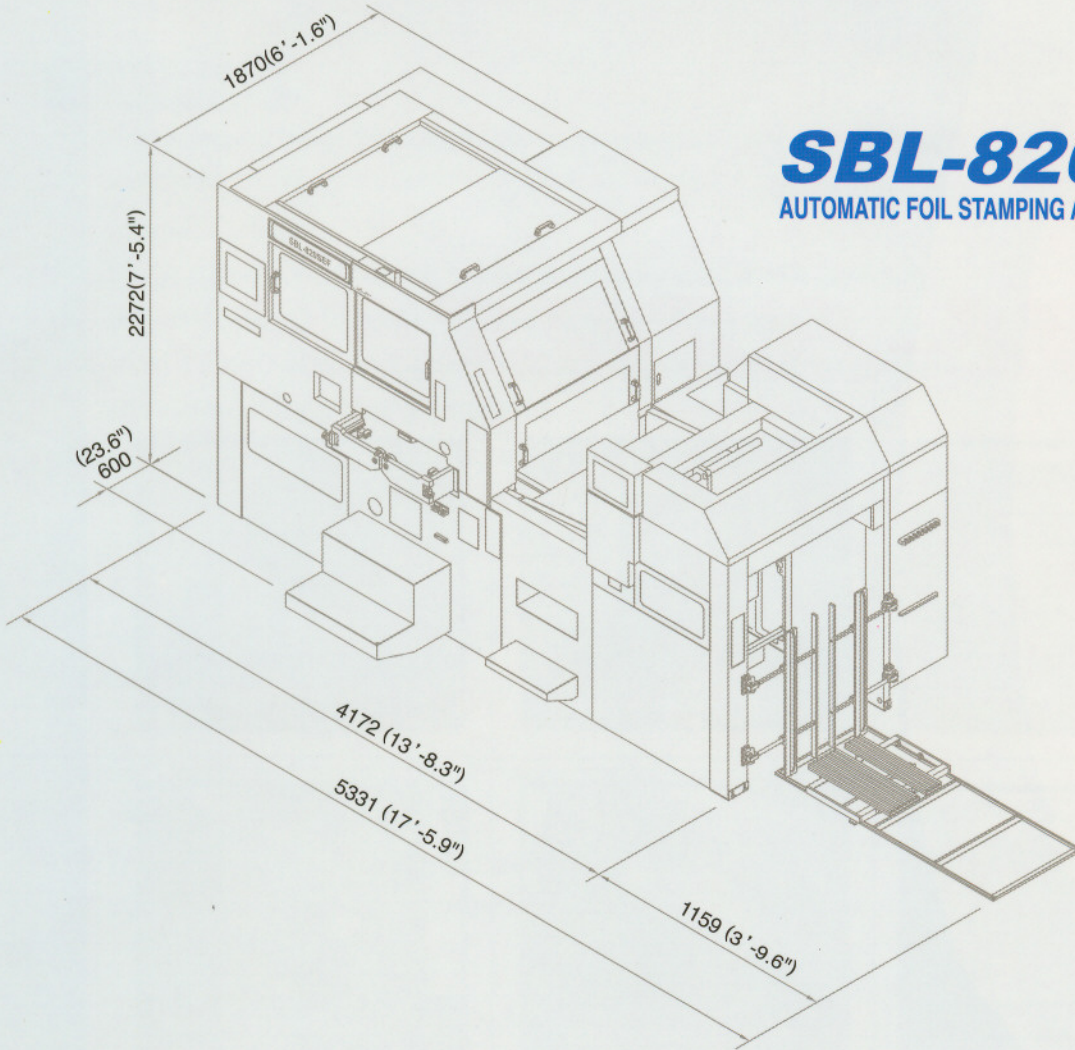

SBL-820SEF *Avior*

AUTOMATIC FOIL STAMPING AND DIECUTTING PLATEN

FOIL STAMPING SPECIFICATIONS

Foil Puller Shafts	3
Maximum Foil Diameter	Ø240 mm roll (9.5")
Rewind Shafts	3
Maximum Rewind Diameter	Ø 260 mm roll (10.2")
Maximum Foil Stamping Area	800 mm x 580 mm (31.5" x 22.8")
Heating Zones	8 Zones
Temperature Control Range	Up to 180 °C (356°F)
Heater Power	16 Kw

DIE-CUTTING SPECIFICATIONS

Maximum Paper Size	815 x 600 mm (32" x 23.6")
Minimum Paper Size	320 x 280 mm (12.6" x 11")
Maximum Cutting Size	805 x 590 mm (31.7" x 23.2")
Maximum Cutting Pressure	200 Tons
Paper Thickness (Stock Range)	0.1 - 2 mm (0.0039" - 0.07")
Register Tolerance	+/- 0.2 mm (+/- 0.008")
Minimum Gripper Margin	9.5 mm (0.37")
Inner Chase Size	926 x 618 mm (36.5" x 24.3")
Face Plate Size	848 x 600 mm (33.4" x 23.6")
Maximum Cutting Speed	8,000 cycles per hour
Variable Speed Main Motor	7.5 Kw
Machine Power Required	220V, 60 Hz, 3-Phase, 55A
Machine Dimensions (LxWxH)	5,331 x 2,470 x 2,272 mm (17'-5.9" x 8'-1.2" x 7'-5.5")
Total Weight (approx.)	10 Tons (22,100 lbs)

Specifications are subject to change without notice.

Representative



CG MACHINERY INC.

Unit 1130, 12191 Hammersmith Way
 Richmond, B.C. V7A 5H2 Canada
 Tel: 604-272-0068 www.cgmachinery.com
 Fax: 604-272-0061 email: sales@cgmachinery.com



SBL MACHINERY CO., LTD.

No.168 Chung Yang Rd., Sec.3, Tu Cheng City,
 Taipei Hsien, Taiwan.

Tel : 886-2-22673770 Fax : 886-2-22676193

http : // www.sblmachinery.com

E-mail : info@sblmachinery.com