

Designed With Your Needs in Mind

Goodstrong
High Speed Precision Dual Rotary Sheeter



GMC-TC 1600

Good & Strong

This cost-effective, yet well-built Sheeter can be ordered to include an extra Reel Stand, Auto-Web Splicer and Non-Stop Grid System for even higher productivity gains.





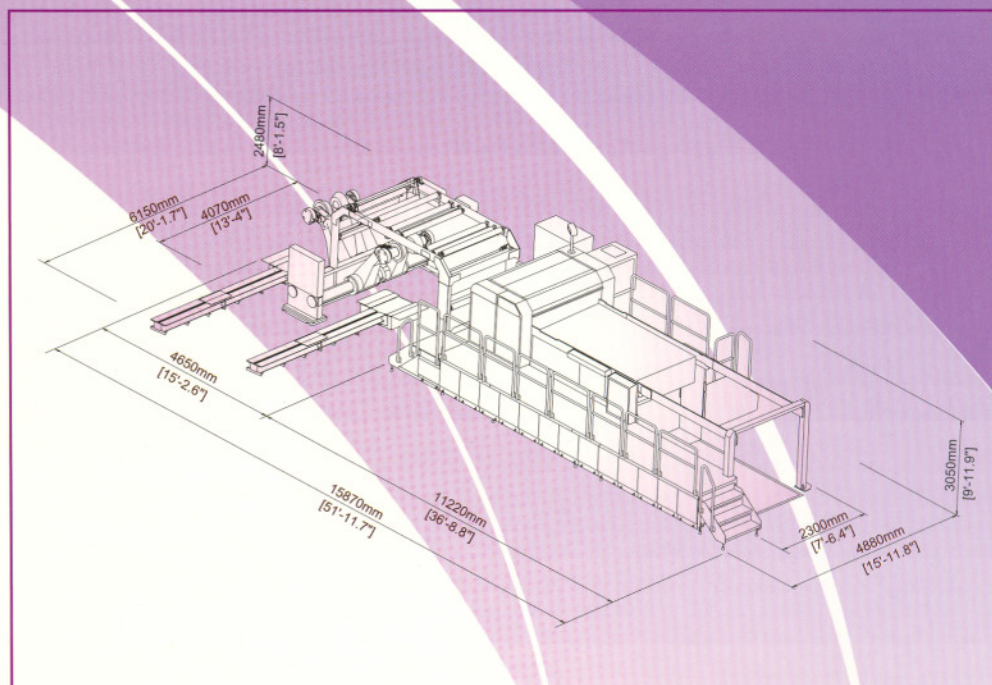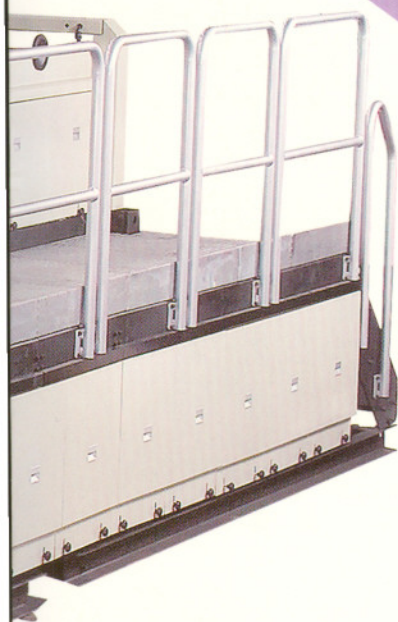

Specification

- Reel Width Trimmed: 400 mm – 1,600 mm (16" – 63")
- Reel Diameter: Ø 300 mm – 2,100 mm (Ø 12" – 82")
- Reel Max. Weight (Per Reel): 3,200 Kg (7,000 Lbs)
- Standard Tapered Chucks: 76 mm – 305 mm (3" – 12")
- Speed Curve: Up to 300 M/Min (990 ft/Min)
- Knife Loading: 1,000 gsm (200 Lbs/1,000 sq.ft)
- Cut-Off Range: 460 mm – 1,778 mm (18" – 70")
- Material Applied: Fine Paper to Paperboard, coated or uncoated.
Single or Multiple Webs.
- Max. Pile Height Clearance: 1,650 mm (65")
- Max. Pile Weight: 2,500 Kg (5,500 Lbs)
- Total Electrical Power: 3-Phase, 380V/480V, 55 KW, 50Hz/60Hz
- Specifications may change without notice.

Advanced Design Concept



The advanced design of the twin helical knife cylinders, which are directly driven by a brushless AC Servo Motor.




Touch Screen operator console integral to knife with order entry and diagnostics.



Dual position shaftless pivoting arm unwind stand with in-floor track and trolley system.
RE aircooled pneumatically controlled brakes on each arm.



High speed outfeed tape section with Reject Gate.

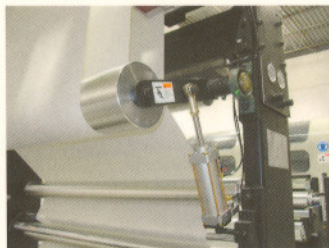


The GMC swing arm dancer roller with Auto Tension Control.




Motor driven decurlers with remote push button control for each De-Curler Device.



Fully synchronized speed between high speed outfeed and overlap tape section to maintain a proper shingle.

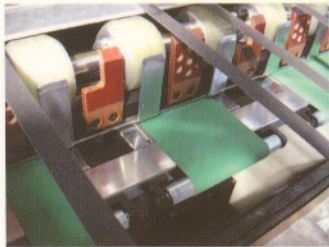

Belted Non-stop grid system for continuous skid delivery.

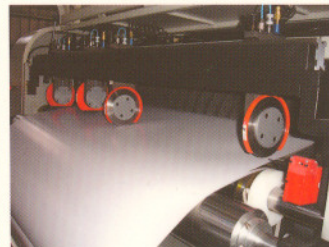

The heavy duty Pneumatic Slitters ensure the stable and clean slitting.



Web guide system provides positive web edge position control.



Exit Roller to the Layboy with Air Jets to supply a curtain of air onto the underside of the sheets and assist delivery of the sheet into the pile.



Manually adjusted side jogger unit with vibration.



Heavy duty Hydraulic scissors Lift with dual directional discharge. Complete with automatic lowering from a pre-set pile height sensor.



精創機械股份有限公司
GOODSTRONG MACHINERY CO., LTD.

No. 21, Lane 85, Chye Tou Rd., Sec. 1, Lung Ching, Taichung, Taiwan.

Tel: +886-4-2635-9981 Email: gmc@goodstrong.com.tw

Fax: +886-4-2635-9982 <http://www.goodstrong.com.tw>

Local Representative



CG MACHINERY INC.

Unit 1130, 12191 Hammersmith Way

Richmond, B.C. V7A 5H2 Canada

Tel: 604-272-0068

www.cgmachinery.com

Fax: 604-272-0061

email: sales@cgmachinery.com