


**TSBL** GROUP

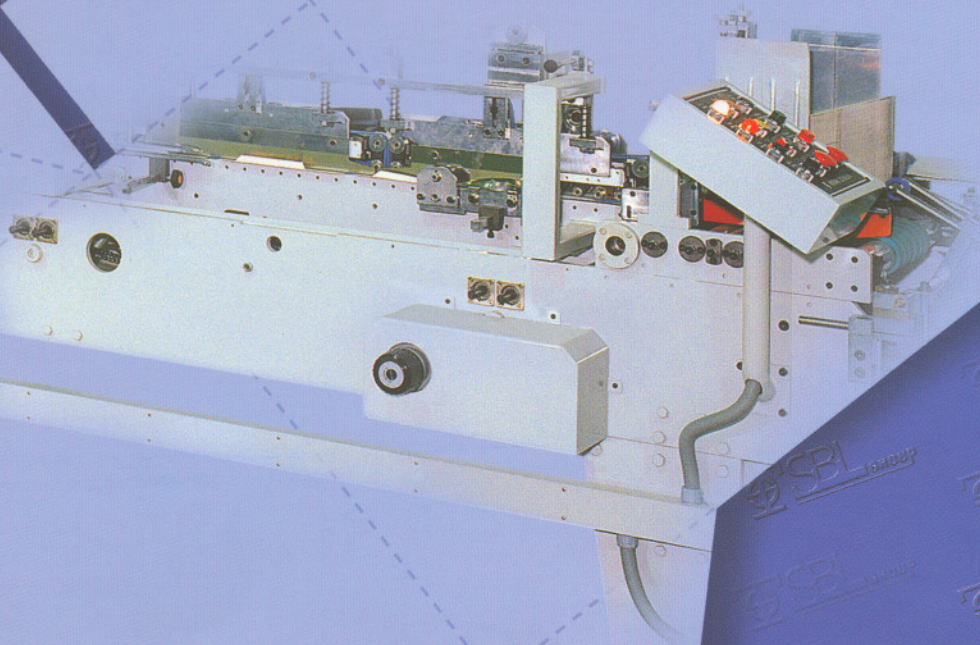

**TS-450NHW**

**高性能糊摺盒機**

**HIGH SPEED FOLDING AND GLUING MACHINE**

# TS-450NHW

## 高性能糊摺盒機



HIGH SPEED FOLDING AND GLUING MACHINE

### 主要功能：

1. 本機採用雙面牙桿調整機構，一人操作，簡易、迅速。
2. 給紙部採用單板操作機構，快速、簡便、連續自動正確給紙。
3. 2個上糊筒裝置，可精確及穩定的上糊底貼部。
4. 本機底貼、兩側邊貼，經特殊設計，操作速捷簡便，初學者亦能駕輕就熟。
5. 下糊筒裝置，調量穩定，簡易保養，搖桿操作迅速。
6. 輸送部獨特設計機構，壓著均衡確實，確保完美品質。
7. 採用光電計數器，可行定量計數，兼自動噴記踢板兩用裝置。



※本公司專業產品，各大、中、小型高速糊摺盒機、高速燙金軋盒機、貼窗機、製刀模週邊設備等紙器機械。

※本目錄僅供參考，特殊形式製品可另加設計。

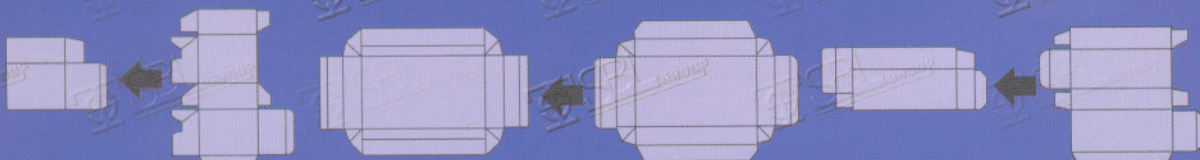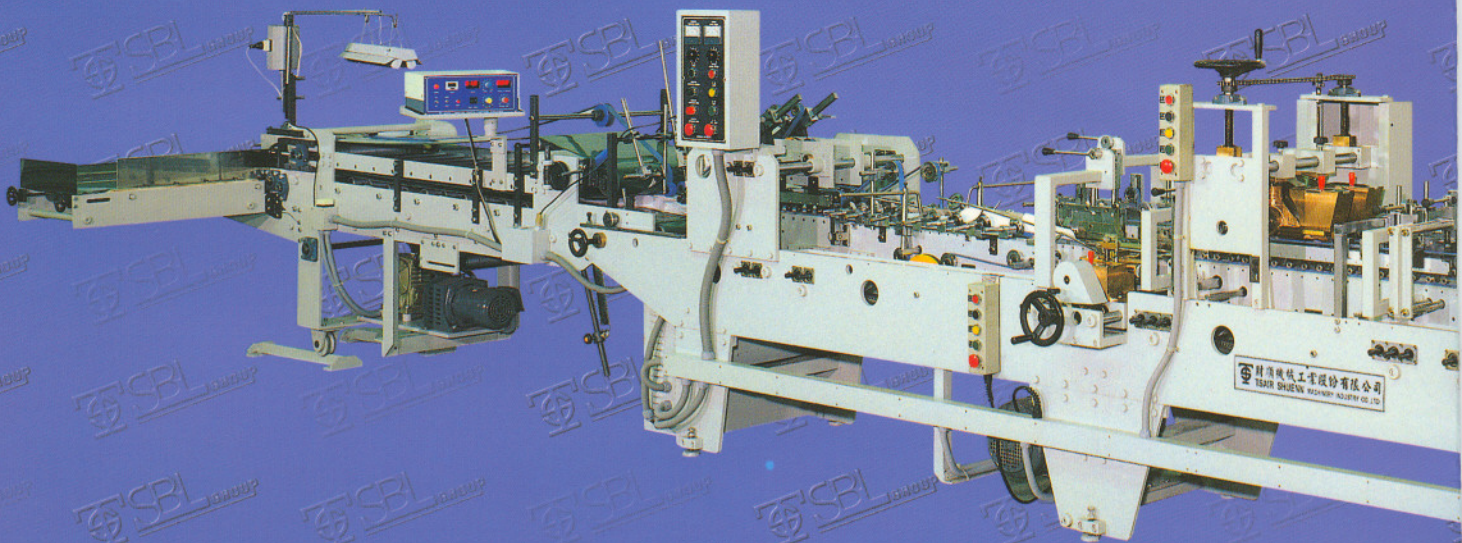


## FEATURES


1. Equipped with screw rod can be adjusted by both sides. Easy to operate for one single operator.
  2. Single plate operating system in feeder features easy, prompt, accurate and automatic continuous feeding.
  3. 2 upper gluing pots designed for accurate and steady lock bottom gluing.
  4. Easy to operate, even for untrained operator. Specially designed mechanism permits bottom and both-sides gluing.
  5. The lower gluing pot equipped with control rod for stable gluing, fast operation, and easy maintenance.
  6. Unique mechanism provides uniform pressure to facilitate more effective gluing of products.
  7. Photo-electric counter installed for preset counting and automatic mark spraying or batting device.
- ※ Various High speed folding and gluing machines, Diecutting and creasing machines, Window patching machine and Die making machine are available. We welcome you to visit our factory.
- ※ This catalog is for general reference; customer's specific designs are welcomed.

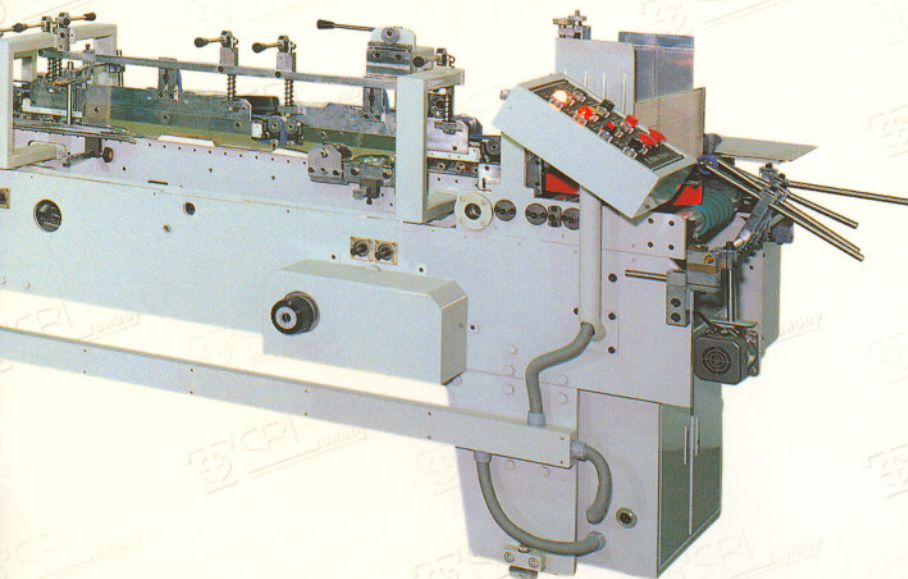


給紙部  
FEEDER



摺返部  
2  
PREFOLDING




3  
底貼部  
BOTTOM FOLDING



4  
下糊筒部  
LOWER GLUING




5  
壓著部  
TROMBONE




6  
輸送部  
CONVEYOR

# TS-450NHW

基礎平面圖  
FLOOR PLAN

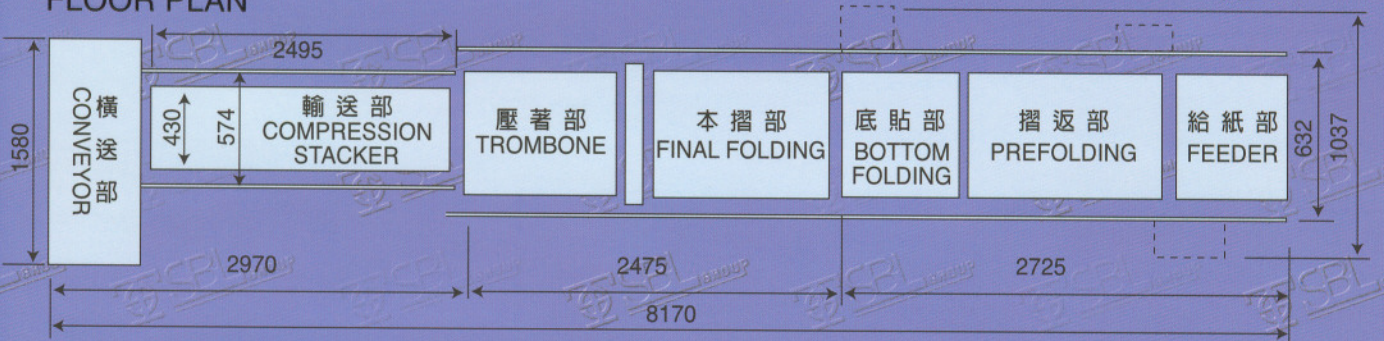

基本製盒尺寸  
BLANK SIZE

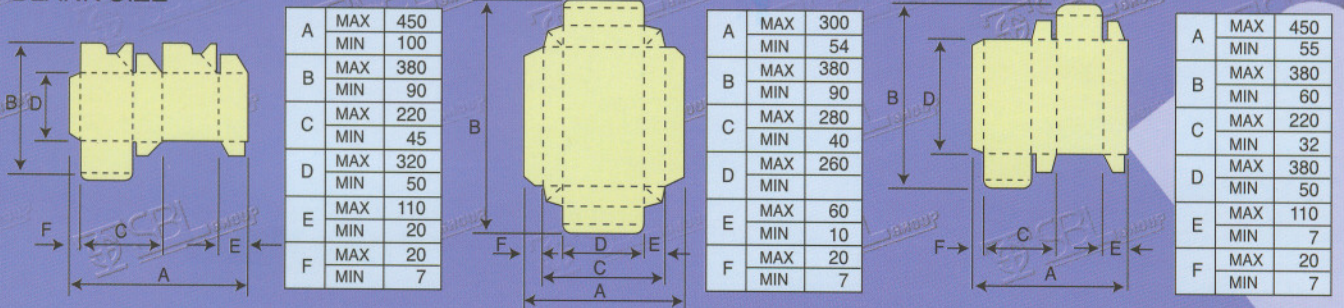

裝箱尺寸  
MEASUREMENT

(A)L5.6m X W1.3m X H1.3m (B)L2.6m X W0.9m X H0.8m

規格

Specifications

適用紙質	紙板	Feed Material	Cardboard.
基本型式	一般邊貼，兩側邊貼，底貼	Fundamental Pattern	Standard folding boxes, double sides boxes, crashlock bottom boxes.
基本能力	MAX200m/min	Capacity	MAX. 200m/min
摺返方式	第1摺線180°，第3摺線135°	Pre-folding	No.1 crease180 NO.3 crease135
給紙方式	正確自動連續給紙	Feeding	Automatic and continuous feeding.
接著劑	溶質性	Adhesive	Emulsion type, soluble in water.
所需電力	3.7KW，AC 220V	Power Required	3.7KW AC 220V
機械重量	3000Kg	Machine Weight	3000Kg

**財順機械工業股份有限公司**  
TSAIR SHUENN MACHINERY INDUSTRY CO., LTD.

公司：臺北縣土城市中央路二段168號  
No: 168 Chung Yang Rd., Sec. 3, Tu Cheng City, Taipei Hsien, Taiwan, R.O.C.  
Tel: 886-2-22673769 · 22673770 · 22674066 · 22673191 Fax: 886-2-22678824  
E-mail: tsair168@ms8.hinet.net



Unit 1130, 12191 Hammersmith Way  
Richmond, B.C. V7A 5H2 Canada  
Tel: 604-272-0068 www.cgmachinery.com  
Fax: 604-272-0061 email: sales@cgmachinery.com